

07/25/00

04-26:00

17

PTO  
09/624923  
07/25/00

Please type a plus sign (+) inside this box ☐

Approved for use through 09/30/2000 OMB 0651-0032  
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

|  |  |  |
|--|--|--|
| <b>UTILITY<br/>PATENT APPLICATION<br/>TRANSMITTAL</b><br><small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small> | Attorney Docket No.                      | JTT006-00  |
|  | First Inventor or Application Identifier | Stuart D. Green, et al.                                  |
|  | Title                                    | METHOD FOR COMMUNICATION SECURITY AND APPARATUS THEREFOR |
|  | Express Mail Label No.                   | EL519119076US  |

|   |   |
|---|---|
| <b>APPLICATION ELEMENTS</b><br><small>See MPEP chapter 600 concerning utility patent application contents</small>   | <b>ADDRESS TO:</b> Assistant Commissioner for Patents<br>Box Patent Application<br>Washington, DC 20231   |
| 1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17)<br><small>(Submit an original and a duplicate for fee processing)</small>   | 5. <input type="checkbox"/> Microfiche Computer Program (Appendix)  |
| 2. <input checked="" type="checkbox"/> Specification [Total Pages 26]<br><small>(preferred arrangement set forth below)</small> <ul style="list-style-type: none"><li>- Descriptive title of the Invention</li><li>- Cross References to Related Applications</li><li>- Statement Regarding Fed sponsored R &amp; D</li><li>- Reference to Microfiche Appendix</li><li>- Background of the Invention</li><li>- Brief Summary of the Invention</li><li>- Brief Description of the Drawings (if filed)</li><li>- Detailed Description</li><li>- Claim(s)</li><li>- Abstract of the Disclosure</li></ul> | 6. Nucleotide and/or Amino Acid Sequence Submission<br><small>(if applicable, all necessary)</small> <ul style="list-style-type: none"><li>a. <input type="checkbox"/> Computer Readable Copy</li><li>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</li><li>c. <input type="checkbox"/> Statement verifying identity of above copies</li></ul>  |
| 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 7]  | <b>ACCOMPANYING APPLICATION PARTS</b><br>7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))<br>8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input checked="" type="checkbox"/> Power of Attorney<br><small>(when there is an assignee)</small><br>9. <input type="checkbox"/> English Translation Document (if applicable)<br>10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations<br>11. <input type="checkbox"/> Preliminary Amendment<br>12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503)<br><small>(Should be specifically itemized)</small><br>13. <input checked="" type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired<br><small>(PTO/SB/09-12)</small><br>14. <input type="checkbox"/> Certified Copy of Priority Document(s)<br><small>(if foreign priority is claimed)</small><br>15. <input type="checkbox"/> Other. |
| 4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none"><li>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</li><li>b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d))<br/><small>(for continuation/divisional with Box 16 completed)</small><ul style="list-style-type: none"><li>i. <input type="checkbox"/> DELETION OF INVENTOR(S)<br/>Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</li></ul></li></ul>   |   |

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment.

|                                       |                                     |   |                                |
|---------------------------------------|-------------------------------------|---|--------------------------------|
| <input type="checkbox"/> Continuation | <input type="checkbox"/> Divisional | <input type="checkbox"/> Continuation-in-part (CIP) | of prior application No. _____ |
| Prior application information         |                                     | Examiner  | Group / Art Unit               |

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label: \_\_\_\_\_ or ☒ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

|         |                                 |           |                |          |                |
|---------|---------------------------------|-----------|----------------|----------|----------------|
| Name    | J. V. Myers & Associates, P.C.  |           |                |          |                |
| Address | 7101 Highway 71 West, Suite 214 |           |                |          |                |
| City    | Austin                          | State     | TX             | Zip Code | 78735          |
| Country | USA                             | Telephone | (512) 301-8330 | Fax      | (512) 301-8340 |

|                   |                   |                                   |              |
|-------------------|-------------------|-----------------------------------|--------------|
| Name (Print/Type) | Jeffrey Van Myers | Registration No. (Attorney/Agent) | 27,362       |
| Signature         |                   | Date                              | 25 July 2000 |

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)  
JTT006-00

Applicant, Patentee, or Identifier: Stuart D. Green, et al  
Application or Patent No.: \_\_\_\_\_  
Filed or Issued: \_\_\_\_\_  
Title: Method for Communication Security and Apparatus Therefor

I hereby state that I am  
☐ the owner of the small business concern identified below.  
☒ an official of the small business concern empowered to act on behalf of the concern identified below.

NAME OF SMALL BUSINESS CONCERN Triptych Microsystems, Inc.

ADDRESS OF SMALL BUSINESS CONCERN 2201 N. Lamar Blvd., Suite 206, Austin, TX 78705

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below:  
☒ no such person, concern, or organization exists  
☐ each such person, concern, or organization is listed below.


Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Marcus L. Yax

TITLE OF PERSON IF OTHER THAN OWNER CEO

ADDRESS OF PERSON SIGNING 8904 Francia Tr., Austin, TX 78748

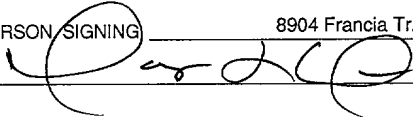SIGNATURE  DATE 25 July 2000

# METHOD FOR COMMUNICATION SECURITY AND APPARATUS THEREFOR

## CROSS REFERENCE TO RELATED APPLICATION

The present invention is related, in part, to the following co-pending application for patent ("Related Application"):

"METHOD AND APPARATUS FOR SECURE COMMUNICATION WITH  
A SET TOP COMPUTING SYSTEM" by Scott G. Brown, having Application Serial  
5 No. 09/332,795, filed on 14 June 1999, and assigned to the assignee hereof.

## BACKGROUND OF THE INVENTION

### 1. TECHNICAL FIELD.

The present invention relates generally to securing communications  
between computer systems, and, in particular, to security methods and  
apparatus for maintaining the security of a local client computer system from a  
10 remote server computer system.

### 2. BACKGROUND ART.

In general, in the descriptions that follow, we will *italicize* the first  
occurrence of each special term of art which should be familiar to those skilled in  
the art of communication system security. In addition, when we first introduce a  
15 term that we believe to be new or that we will use in a context that we believe to  
be new, we will **bold** the term and provide the definition that we intend to apply  
to that term. In addition, throughout this description, we may use the terms  
*assert* and *negate* when referring to the rendering of a signal, signal flag, status  
bit, or similar apparatus into its logically true or logically false state, respectively.

20 With the proliferation of public communication networks, more and more  
computers are accessible from remote locations. The worldwide public network,  
the *Internet* and its *alter ego* the *World Wide Web*, comprises many millions of  
computers coupled together through either low-speed *Internet Service Providers*  
("ISPs"), or high-speed *Broad-band Service Providers* ("BSPs") (collectively, "SPs").

25 The ready availability of direct access to so many personal or business computer

systems has resulted in a proliferation of criminal *hackers* or *crackers* attracted by the challenge of electronically *hacking* into such computing systems and either stealing commercially valuable information or just causing havoc. For convenience of reference, we shall refer to all such untrustworthy

5 communication networks as **RedNets**. In contrast, we shall refer to all trustworthy local networks as **BlackNets**, even though, in many instances, the BlackNet may consist of a single *node* owned and operated by a sole individual or business *client*.

To date, the most effective prior art communication security mechanism,  
10 known as a *firewall*, interposes a trusted, autonomous device or *portal* between a BlackNet and a RedNet. During initial power-up, the portal generally maintains strict communication *silence*, and only opens the communication *ports* when full security has been assured. Once initialized, the portal generally forwards to the RedNet all communication *transactions* originated by the BlackNet. In contrast,  
15 all transactions originating in the RedNet that are addressed to the BlackNet are first examined to determine if selected characteristics of the transaction match any of a plurality of *protection rules* stored in a local *protection rule base*. If a particular transaction is found to match one of the protection rules, it is blocked and not forwarded to the BlackNet; otherwise, the transaction is forwarded to  
20 the BlackNet. An example of such a prior art communication security system is shown and described in US 5,606,668. Although communications on many RedNets, including the Internet, are *packetized*, we prefer to treat each individual *packet* as a separate transaction, and, throughout the following description, when we use the term "transaction" we intend to include individual packets in  
25 appropriate instances.

A first type of prior art protection rule, usually called a *packet filter*, requires the comparison of the *Internet Protocol Source Address* ("IPSA") of each incoming transaction to the IPSA of a known cracker. Since it is a trivial matter for a cracker to temporarily usurp an assigned but currently inactive IPSA and so  
30 masquerade as an innocent user, this type of protection rule tends to be rather transient. Typically, it is the responsibility of the local client or, if available, the client's *system administrator* ("sys-admin"), to periodically update the local

protection rule data base, manually, using information shared by other sys-admins on known *websites*. Firewalls that perform only packet filtering are sometimes referred to as *network-level firewalls*. In general, network-level firewalls tend to be simple and fast because they are not required to perform  
5 complex analysis of packet contents or traffic history.

A second type of prior art protection rule, called a *stateful inspection*, requires the examination of any of a number of distinct characteristics of the transaction, such as *type*, to determine if the transaction is requesting an inappropriate response from the BlackNet. Since such requests may indeed be  
10 valid in a particular situation, depending upon the specific nature of the BlackNet and its recent activity on the RedNet, such protection rules tend to be rather general in scope. As a result, in some cases, the portal must request the assistance of the local sys-admin in determining the most appropriate response. Clearly, this results in additional workload for the sys-admin, and may result in  
15 unacceptable delays in validating essential BlackNet transactions. One additional negative aspect of stateful inspection rules is that they tend to be devised as point solutions to known attack strategies. Often, by the time an appropriate protection rule set has been devised and distributed among the cooperating sys-admins, the cracker community has already devised and distributed (via  
20 notorious cracker websites) more sophisticated methodologies. Again, given that most sys-admins are already overworked, there may be significant delays in installing the newest rule sets, leaving the BlackNet vulnerable for unacceptably long periods of time. Firewalls that perform stateful inspection are sometimes referred to as *stateful inspection firewalls*. In general, stateful inspection firewalls  
25 tend to be more complex and slower because they are required to perform complex analysis of packet contents or traffic history.

In third type of firewall, called a *proxy-level firewall*, packets originated on the BlackNet are *re-addressed* to appear on the RedNet as if originated by the firewall portal itself. As a result of acting as a proxy for the client, the true  
30 address of that client is hidden from the RedNet. Proxy-level firewalls often perform additional useful services, such as BlackNet auditing, traffic monitoring, and time-of-day control.

In view of the interactive nature of current generation firewall portals, the implementing hardware tends to be in the form of a dedicated computer system, with associated input and output devices for the sys-admin to use in updating the protection rule data base and other support activities such as *traffic analysis*.

- 5 While the significant cost of such systems, both initially and over time, can perhaps be amortized over a number of local nodes, that cost is certainly a significant barrier to widespread use in the home or small business environments. In fact, the requirement for a skilled sys-admin may itself make the cost of such a solution prohibitive to even moderate sized businesses.

- 10 One example of a very sophisticated, commercially available firewall system that implements most of the capabilities that we believe to be essential is the WatchGuard LiveSecurity™, available from WatchGuard Technologies, Inc., of Seattle, OR. However, as will be apparent from reviewing the white paper, "WatchGuard LiveSecurity™ - A New Approach to Network Security and
- 15 Managed Security Services", submitted herewith and incorporated herein by reference, this system is still dependent upon the timely recognition at a centralized location of new threats. Thus, until sufficient information regarding a new form of attack is finally collected, manually, at a centralized location, no response can be crafted and distributed, leaving all clients vulnerable for what
- 20 may be a dangerously long time. Given the speed with which new threats can spread, such reactive systems are, we submit, simply inadequate.

- In general, current commercially available firewall technology is too difficult to maintain since each portal tends to stand alone and can defend against only those attack sources or strategies of which it has been made aware. In
- 25 particular, for individuals and small business owners, it is desirable to have an efficient, low maintenance security device that will automatically protect their computer systems from unauthorized accesses, and proactively report suspicious activities to a centralized threat assessment and response center. Even more important, there is an urgent need for a more convenient and, especially, timely
- 30 mechanism for updating the firewall portal as to the sources and strategies of new threats.

## BRIEF SUMMARY OF THE INVENTION

In a distributed, electronic firewall system which prevents transfer of selected communication transactions from an untrustworthy network to a trustworthy network: a firewall server, connected to the untrustworthy network, maintains a database of protection rules, each of which, when applied to a communication transaction, identifies that communication transaction to be a respective one of the selected communication transactions; and a plurality of firewall portals, each of which, when connected between the untrustworthy network and the trusted network, selectively transfers the database of protection rules from said server via said untrustworthy network; receives a communication transaction from the untrustworthy network for transfer to the trustworthy network; applies each of the protection rules to the received communication transaction; and prevents the transfer of the received communication transaction to the trustworthy network if a protection rule identifies the received communication transaction to be a respective one of the selected communication transactions.

In accordance with our invention, each of the protection rules may be a selected one of two classes, exclusion or guard, and the portal selectively transfers to the server at least a portion of each received communication transaction identified by a protection rule of the guard class to be a respective one of the selected communication transactions. In response, the server analyzes said portion to determine if said communication transaction represents a security threat to the trustworthy network, and, if it is so determined, constructs a new protection rule of the exclusion class and adds said new protection rule to said database. Preferably, the server analyzes such transactions using an expert system, which may allow guidance by human experts.

## BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Our invention may be more fully understood by a description of certain preferred embodiments in conjunction with the attached drawings in which:

Fig. 1 illustrates in block diagram form a secure communication system, that we call a **FireNet**, constructed in accordance with the preferred embodiment

of our invention, in which a plurality of BlackNets, each locally protected by a respective **FireBreak**, communicate securely over a RedNet with a remote **FireNet Server**;

Fig. 2 illustrates in block diagram form a FireBreak according to the preferred embodiment of our invention;

Fig. 3, comprised of Figs. 3A - 3D, illustrates in flow diagram form a method of implementing the FireBreak portion of the FireNet, according to the preferred embodiment of our invention

Fig. 4 illustrates in flow diagram form the update session procedure of the FireBreak OS;

Fig. 5 illustrates in flow diagram form the service initiation procedure of the FireBreak OS;

Fig. 6 illustrates in flow diagram form the service termination procedure of the FireBreak OS; and

Fig. 7 illustrates in flow diagram form a method of implementing the Server portion of the FireNet, according to the preferred embodiment of our invention.

In the drawings, similar elements will be similarly numbered whenever possible. However, this practice is simply for convenience of reference and to avoid unnecessary proliferation of numbers, and is not intended to imply or suggest that our invention requires identity in either function or structure in the several embodiments.

## DETAILED DESCRIPTION OF THE INVENTION

Our invention facilitates the construction of an electronic, distributed firewall system that we call a FireNet. In general, our FireNet is comprised of a FireNet Server that is connected via a RedNet to a plurality of remote FireBreaks, each of which protects a respective BlackNet against attacks via the RedNet. However, unlike prior art firewall systems, our FireNet Server automatically gathers information collected by, and coordinates the defensive



activities of, all FireBreaks so that the entire FireNet responds very quickly to attacks made against any FireBreak in the FireNet.

During a unique initial power-up sequence, each FireBreak maintains strict communication silence, and only opens the communication ports when full security has been assured. Once initialized, the FireBreak generally allows all outgoing communication transactions to pass, although, to prevent *IP spoofing*, the FireBreak should discard any outgoing transaction which has an invalid IPSA. However, the FireBreak attempts to match selected characteristics of each incoming transaction against each of a plurality of protection rules stored in a local protection rule base. As in prior art firewall portals, if a match is detected, our FireBreak will discard the offending transaction.

Assume for the moment that a match is not detected, but that there is something "unexpected" about the transaction, indicating that an attack might be in progress. Unlike the prior art, our FireBreak will collect certain pertinent information regarding the transaction, such as its type and IPSA, which it promptly forwards to the FireNet Server. Then, at the option of the client, the FireBreak will either discard the transaction as being too dangerous to allow through, or pass the transaction but, perhaps, assert a warning signal, either auditory, visual or electronic.

Meanwhile, back at our FireNet Server, the information regarding the suspicious transaction will be quickly analyzed in an attempt to determine if an attack is indeed in progress, and, if so, the nature and severity of that attack. If the attack source can be identified, either directly or indirectly, or the attack strategy appears to be a variant of a known strategy, the FireNet Server will attempt to automatically construct one or more new protection rules appropriate for the new source or strategy of attack. Preferably, the FireNet Server *hosts* an *expert system* which has been trained by human experts how to devise an appropriate protection rule set. If necessary, the expert system can immediately enlist the assistance of the human experts in solving novel problems. This centralized data collection, attack analysis, and rule set generation tends to produce an optimum defense in a minimum amount of time.

All pertinent information regarding new attack sources and strategies, and any new protection rules will be added by the FireNet Server to a highly secure, FireNet *database*. Periodically, say every Fifteen (15) to Thirty (30) minutes, each remote FireBreak will *log in* to the FireNet Server, using a secure *protocol*, and transfer into its local protection rule base the most current set of protection rules necessary to protect the BlackNet against all known sources and strategies of attack. Thus, after only a relatively brief period of time, when another attack from the same source or using the same attack strategy is attempted against any FireBreak in the FireNet, the attack transactions will match the new protection rule and be automatically discarded.

Preferably, to reduce the update workload of the FireNet Server, the updated rules sets may be periodically transferred to all cooperating SPs, with each thereafter updating the FireBreaks of their respective subscribers. Of course, for very large FireNets, multiple FireNet Servers may be required at widely spaced locations worldwide to assure timely response to each FireBreak in the FireNet, and each such FireNet Server must be provided with secure communications with all other FireNet Servers to assure coordinated, timely worldwide defense against new attack sources and strategies.

Fig. 1 illustrates a FireNet 2 comprised of a FireNet Server 4 connected via a RedNet 6 to a BlackNet 8 and a BlackNet 10 each isolated from the RedNet 6 by a respective FireBreak 12. Of course, other users are also connected to the RedNet 6, such as the Cracker 14. The FireNet Server 4 includes a database 16, various computational units 18, and it's own FireBreak 12. The computational units 18 receive information regarding suspicious accesses from each FireBreak 12 and, perhaps with the assistance of human experts, create protection rules designed to thwart such attacks. These protection rules are then stored in the database 16. Periodically, each FireBreak 12 in the FireNet 2 logs in with the FireNet Server 4 and transfers the most recent set of protection rules so that, thereafter, that FireBreak 12 will also be able to defend its BlackNet against attacks from a particular source or using a particular attack strategy, without itself ever having been so attacked in the past. For example, if BlackNet 8 reports to the FireNet Server 4 that it is under attack by Cracker 14, the

appropriate protection rules will be transferred by BlackNet 10 within a few minutes, so that BlackNet 10 can thereafter defend itself from any attack by Cracker 14 using the same IPSA or attack strategy. In this manner, every FireBreak 12 in the FireNet 2 benefits from the body of knowledge gathered by FireNet 2 as a whole.

As shown in Fig. 2, our FireBreak 12 includes a *central processing unit* or CPU 20 which is connected via bus 22 to the RedNet 6 via a RedPort 24, and to a BlackNet, say, for example, the BlackNet 8 via a BlackPort 26. Depending upon the type of communication media used in the RedNet 6, the RedPort 24 may comprise a *modem* interface, an *Ethernet*-type interface or other suitable interface circuit. Similarly, depending upon the type of communication media used in the BlackNet 8, the BlackPort 26 may be an Ethernet-type interface, or other suitable parallel or serial interface circuit.

The *system memory* of the FireBreak 12 is specially partitioned into a Primary Memory 28 and a BackUp Memory 30, both of which can be implemented in any of a number of conventional types of *Non-Volatile Random Access Memory* or NVRAM. Additional *working memory* is provided by a conventional RAM 32, which can be either *static* or *dynamic*, or a combination of both. Essential system software routines, such as a *bootloader*, and certain fixed system parameters, are stored in a *Read Only Memory* or ROM 34, which is preferably also of a NVRAM type.

In our preferred embodiment, we start with a *hardened* variant of an existing *operating system* ("OS"), such as the well-known "Linux", and then add our special software security modules to create a unique **FireBreakOS**. At the time that each FireBreak 12 is manufactured, the then-current version of this FireBreakOS is installed, first as a **PrimaryOS** in the Primary Memory 28, and then as a **BackUpOS** in the BackUp Memory 30. Contemporaneously, *checksums* are pre-calculated using a conventional algorithm for the *object code* or *binaries* of each of the software modules of the OS, and then stored in the ROM 34 as a **Verification Dictionary**. In the ROM 34 is also permanently stored a *private key*

that is unique to that FireBreak 12. Of course, other suitable memory allocation schemes may be devised.

According to our invention, there are Two (2) classes of protection rule, **Exclusion** and **Guard**. Each Exclusion rule, when successfully applied to a transaction received from the RedNet 6, results in the automatic exclusion from transfer of that transaction to the BlackNet 8. Each Guard rule, when successfully applied to a transaction received from the RedNet 6, results, at the option of the client, in either the automatic exclusion from transfer of that transaction to the BlackNet 8 or actual transfer of that transaction to the BlackNet 8 simultaneously with an assertion of an appropriate warning signal. If desired, any rule, whether Exclusion or Guard, may be constructed so as to dynamically redirect any identified transaction to a particular node within the client, such as the computer station of the sys-admin, for local record keeping and analysis. Preferably, each rule has a predefined **lifetime** during which it will be **active**. Usually, the lifetime of a rule is determined when the rule is activated during initial system startup or during rule update. However, provision may be made for reviving selected rules, and for rules having perpetual lifetimes. Preferably, a set of basic protection rules are stored in either the ROM 34 at the time of manufacture, or together with the PrimaryOS and BackUpOS at the time they are stored into their respective NVRAMs. In general, to prevent unauthorized tampering, the FireBreak 12 should be unable to actually remove rules from the local databases or to assign a fixed lifetime to rules created with perpetual lifetimes.

Operation of our FireBreakOS is illustrated in Fig. 3. Each time a FireBreak 12 is powered up, the various hardware components will initially perform a conventional *Power on Self Test* or POST (step 36), during which each component capable of doing so runs the manufacturer's built-in self-tests and hardware diagnostics. If the hardware passes POST, the bootloader, resident in the ROM 34, will be launched (step 38), and will first determine the operational status of all *board level* components (step 40). If there is an irreconcilable problem, an alarm will asserted, such as illuminating a *light emitting diode* or LED visible on the external surface of the FireBreak 12 or, perhaps, presenting a suitable error message on a *liquid crystal display* or LCD on the exterior surface of

the FireBreak 12. If all self-tests are successful and no system hardware problems are detected, the bootloader will select the PrimaryOS as the **ActiveOS** (step 42).

Depending upon the selected OS, the bootloader will *load* the ActiveOS  
5 into the RAM 32 (step 44), and then check the *continuity* of the associated  
*filesystem*. If the filesystem is found to be in order, the bootloader will then  
launch the ActiveOS (step 46), which promptly *mounts* the *root* or "/" filesystem  
(step 48), but restricted to *read-only*. One of the major directories that is created  
during the mount process is a *temporary* or /tmp directory. According to our  
10 invention, the Verification Dictionary is initially made accessible via a respective  
entry in this /tmp directory.

The ActiveOS then initializes various system configuration and control  
*structures* according to available hardware resources (step 50). To facilitate  
future expansion, we recommend providing *hardware detection stubs* for each  
15 optional hardware component which might be used in a maximum configured  
FireBreak 12.

The ActiveOS then calculates the checksums of all of its system binaries  
and verifies each against the corresponding checksum stored in the Verification  
Dictionary, which, as was explained above, is accessible via the /tmp directory of  
20 the initial root filesystem (step 52). If any critical binary is found to be invalid  
(step 54), suggesting that a cracker may have managed to corrupt the selected  
OS, and the ActiveOS is the PrimaryOS (step 56), then the ActiveOS will select the  
BackUpOS as the ActiveOS (step 58), and initiate OS relaunch (see, step 44). If an  
invalid binary is found and the BackUpOS is already the ActiveOS, then the entire  
25 system is suspect, and the ActiveOS will proceed to shut down (see, step 78).

If the binaries of the ActiveOS are found to be valid and the ActiveOS is  
the PrimaryOS (step 60), the ActiveOS compares the version date of the  
PrimaryOS to that of the BackUpOS (decision 62), and if the BackUpOS is older,  
the ActiveOS copies the PrimaryOS from the Primary Memory 28 into the  
30 BackUp Memory 30 (step 64). As will be described below, the PrimaryOS may

be periodically updated by the FireNet Server 4 and this procedure allows the BackUpOS to also be securely updated.

Having validated (and, perhaps, updated) the BackUpOS or, alternatively, discovered that the ActiveOS is the BackUpOS (see, step 60), the ActiveOS creates a new /tmp directory (step 66), this time in the RAM 32, and *maps* it over the /tmp directory that was created when the filesystem was initially mounted (see, step 48). As a result of this remapping, the Verification Dictionary containing the checksums is completely hidden before the RedPort 24 is opened.

Assume for a moment that a cracker has, at some time since the last boot load, somehow managed to *hack* into the FireBreak 12 and modify at least one of the system binaries of the ActiveOS. Upon comparing, during the next boot load, the calculated checksum of the hacked binary against the proper checksum stored in the Verification Dictionary, the hack will be discovered and appropriate action taken. Thus, unless the cracker is also able to hack into the Verification Dictionary and store the checksum of the hacked module in the correct location, the hack will inevitably be discovered. However, before the RedPort 24 is even opened, the link to the Verified Dictionary is overwritten, making it very difficult, if not impossible, for a cracker to find and modify.

Once /tmp has been remapped, the ActiveOS can safely open the RedPort 24 (step 68). Since at this time the type of communication protocol used on the network to which the RedPort 24 is connected is unknown, the ActiveOS must first determine the appropriate protocol to use (step 70). At the present time, the two most popular protocols are *Point to Point Protocol over Ethernet* or PPPoE, and *Dynamic Host Configuration Protocol* or DHCP. Initially, the ActiveOS attempts to connect using a default one of these protocols and if this proves unsuccessful, it attempts to use the alternate protocol. Typically, the SP will determine the protocol that is to be used for communication over their network. To reduce initial cost, it may be desirable to constrain a particular FireBreak 12 to a single protocol. Of course, other protocols, both current and future, may be used as desired.

Upon receiving the assigned IPSA (step 80), the ActiveOS executes an update *procedure* (step 82). During the update procedure, illustrated in Fig. 4, the ActiveOS will initiate an update *session*, during which it will transfer any protection rule updates from the FireNet Server 4 (step 84). Preferably, the actual update *session* is conducted using a secure protocol, such as an encryption based upon the private key that was stored in the ROM 34 at the time of manufacture. Another suitable secure protocol is set forth in the Related Application. If new rules were transferred, the ActiveOS updates the local rules database in the RAM 32 (step 86) and schedules the next update session (step 88). We recommend that the period between scheduled update sessions be on the order of between Fifteen (15) and Thirty (30) minutes.

If the ActiveOS is advised by the FireNet Server 4 (step 90) that the FireNet OS has been upgraded, then the ActiveOS will schedule an upgrade session. If the upgrade is indicated as being an emergency upgrade, then the upgrade session will be scheduled as soon as possible, taking into consideration the recent level of activity by the client; otherwise, the upgrade will be scheduled for a period when the level of activity can be expected to be low, such as late at night. If the BackUpOS should ever still be the ActiveOS following an update session (step 92), a major fault has occurred and the ActiveOS will execute the terminate procedure (step 94) and then shut down (see, step 76). If, as will usually be the case, the PrimaryOS is current and the ActiveOS is the PrimaryOS, the ActiveOS simply returns from the update procedure to the main flow.

At this point, the ActiveOS can execute the service initiation procedure (step 96). During the service initiation procedure, illustrated in Fig. 5, the ActiveOS opens the BlackPort 26 (step 98), initiates full communication services between the BlackNet and the RedNet 6 (step 100), and returns to the main flow.

- 5        At this point, the ActiveOS determines if an upgrade session is scheduled (step 102). If no upgrade session is scheduled, but an update session is scheduled (step 104), then the ActiveOS performs the update procedure (step 106; see, Fig. 4). The ActiveOS is now ready to provide normal support services to the client.

One such service consists of filtering of incoming transactions (step 108).

- 10    If a transaction passes all protection rules, it is forwarded to the BlackNet (step 110); whereas if the transaction fails any of the protection rules, it is discarded (step 112). Examples of **active threats** include: a request from any *host* to connect to either the *BackOrifice* or *NetBus* ports, a connection request from any host with an *ICMP "destination unreachable"* response, a *Port Scan* from any unauthorized
- 15    host, more than Fifteen (15) *ICMP "echo requests"* from any single host within a predetermined time window, say One (1) minute, and a *SYN* or *ACK* without *CONNECT* from any host. Some transactions which pass all protection rules may still appear suspicious or suggestive of a threat, in that they are of an unexpected type or are requesting an unusual type of response from the BlackNet.
- 20    Examples of **suggestive threats** include: a request from any host to connect to ports 25, 109, 110, 137, 139, 143 or 220; and a request from any host other than a FireNetServer for connection to any port reserved for emergence FireNet communications. In addition, we reclassify as suggestive threats certain other
- 25    **passive threats** if they are repeated within a predetermined threat interval, say Twenty (20) minutes, including a request from any host to connect to ports 80 or 443.

- Upon identifying a transaction as a threat, the ActiveOS will extract from the suspicious transaction sufficient information for the FireNet Server 4 to determine, if possible, the source and nature of the transaction; if necessary, the
- 30    entire transaction may be saved. The ActiveOS will then initiate an alert session to transfer the threat transaction information to the FireNet Server 4 (step 114),



immediately followed by an update session (step 116; see, Fig. 4). Of course, the ActiveOS can, at the option of the client, forward the suspicious transaction to the BlackNet on the assumption that the client will deal appropriately with it. In such an event, in the background, the ActiveOS might initiate an abbreviated alarm session with the FireNet Server 4 just in case the transaction turns out to be a component of an attack.

During normal operation, the transaction filtering service will resume until, at the next scheduled upgrade time (step 102), the ActiveOS will execute the service termination procedure (step 118). During the service termination procedure, illustrated in Fig. 6, the ActiveOS will terminate all services to the client (step 120), and close the BlackPort (step 122) before returning to the main flow. At this point, the ActiveOS will download the upgrade (step 124) and close the RedPort (step 126). The ActiveOS can now safely update the PrimaryOS (step 128), and then reboot the system (see, step 82).

In our preferred embodiment, we harden the Linux OS with our special security modules to form a FireNetServerOS. Operation of our FireNetServerOS is shown in Fig. 7. In response to receiving a session request from any FireBreak 12, the FireNetServerOS will initiate a session (step 130). If the session was requested by FireBreak 12 to report a threat (step 132), the FireNetServerOS will upload the threat information (step 134). If the request is for an OS upgrade (step 136), the FireNetServerOS will download all such upgrades to the FireBreak 12 (step 138). Similarly, if the session was requested by FireBreak 12 as part of a normal update cycle (step 140), the FireNetServerOS will transfer all relevant updates to the FireBreak 12 (step 142). The FireNetServerOS will then terminate the update session (step 144).

If the FireBreak 12 has reported no threat (step 146), the FireNetServerOS will terminate the session and proceed to other operations (step 148). If a threat has been reported, the FireNetServerOS will invoke an Expert System (step 150) that has been trained by human experts to analyze transactions and identify, if possible, both attack sources and strategies. If the Expert System is able to identify either, it will automatically construct One (1) or more suitable protection

rules, and update the database 16 appropriately. If the Expert System is unable to identify either source or strategy, either because neither are yet known to the Expert System or because the transaction is indeed legitimate, the Expert System will produce a report on a suitable medium, such as a display (step 152) or

5 perhaps in hard copy. Upon subsequent review by human experts, the Expert System may be manually provided additional guidance (step 154) as to a more appropriate or robust analysis methodology. Of course, the human experts may also choose to manually update the database 16 so as to expedite update of the FireNet 2 while the Expert System is being given the necessary supplemental  
10 training. As necessary, the human experts may also upgrade the FireBreakOS (step 156) stored in the database 16 to provide additional services, repair bugs, improve efficiency, *etc.*

Although we have described our FireNet in a context wherein a single, central FireNet Server 4 is responsible for updating each FireBreak 12 in the  
15 entire FireNet 2, we expect that such an arrangement will quickly become overwhelmed by the sheer volume of update traffic. To some extent this problem can be ameliorated by increasing the time between update sessions, but in so doing the FireNet will be vulnerable to new attacks for the duration of the longer update periods. We prefer, instead, to either increase the number of  
20 Servers as the guaranteed system response time approaches a maximum, say Fifteen (15) minutes, or, alternatively, to enlist the assistance of the various SPs to whom our clients subscribe, so that the updates are forwarded, as created by the responsible FireNet Server, to each such SP. Thereafter, each FireBreak can be locally updated using the resources of it's SP. Of course, all threat reports will  
25 still need to be forwarded by the intermediary SPs to any one of perhaps several, widely distributed FireNet Servers. Such a distributed arrangement, in addition to easing the pressure on the FireNet Servers, also decreases the vulnerability of the entire FireNet to single points of failure. Many feasible variations and combinations of such arrangements can easily be envisioned, and may be  
30 suitable in specific instants according to known principles of system redundancy.

Thus it is apparent that we have provided a communication security system or FireNet in which the activities of a plurality of FireBreaks, each

protecting a respective BlackNet against attack from a RedNet, are coordinated by a remote FireNet Server. Those skilled in the art will recognize that modifications and variations can be made without departing from the spirit of our invention. Therefore, we intend that our invention encompass all such variations and modifications as fall within the scope of the appended claims.

## CLAIMS

What we claim is:

1. A communications security system to prevent transfer of selected communication transactions from an untrustworthy network to a trustworthy network, comprising:

5 a server, connected to the untrustworthy network, that maintains a database of protection rules, each of which, when applied to a communication transaction, identifies that communication transaction to be a respective one of the selected communication transactions; and

a portal, connected between the untrustworthy network and the trusted network, that:

10 selectively transfers the database of protection rules from said server via said untrustworthy network;

receives a communication transaction from the untrustworthy network for transfer to the trustworthy network;

15 applies each of the protection rules to the received communication transaction; and

prevents the transfer of the received communication transaction to the trustworthy network if a protection rule identifies the received communication transaction to be a respective one of the selected communication transactions.

2. The security system of claim 1 wherein the transfer of the database from the server to the portal is via a secure protocol.

3. The security system of claim 1:

wherein each of said protection rules may be a selected one of two classes,  
exclusion or guard; and

wherein the portal:

5 prevents the transfer of the received communication transaction to the  
trustworthy network if a protection rule identifies the received  
communication transaction to be a respective one of the selected  
communication transactions, if said protection rule is of the exclusion  
class; but

10 selectively transfers the received communication transaction to the  
trustworthy network if a protection rule identifies the received  
communication transaction to be a respective one of the selected  
communication transactions, if said protection rule is of the guard  
class.

4. The security system of claim 3 wherein the portal selectively transfers to  
the server at least a portion of each received communication transaction  
identified to be a respective one of the selected communication transactions.

5. The security system of claim 4 wherein the server, in response to  
receiving said portion of a communication transaction identified to be a  
respective one of the selected communication transactions by a protection rule of  
the guard class, analyzes said portion to determine if said communication  
transaction represents a security threat to the trustworthy network, and, if it is  
so determined, constructs a new protection rule of the exclusion class and adds  
said new protection rule to said database.

6. The security system of claim 5 wherein the server analyzes said portion  
using an expert system.

7. The security system of claim 6 wherein the server constructs said new  
protection rule using the expert system.

8. The security system of claim 7 wherein the expert system is guided by a human expert.
9. The security system of claim 4 wherein the server, in response to receiving said portion of a communication transaction identified to be a respective one of the selected communication transactions by a protection rule of the guard class, provides said portion to a human expert to determine if said communication transaction represents a security threat to the trustworthy network, receives new protection rules from said human expert, and adds said new protection rules to said database.

continued

10. A communications security method to prevent transfer of selected communication transactions from an untrustworthy network to a trustworthy network, comprising:

5 at a server, connected to the untrustworthy network, maintaining a database of protection rules, each of which, when applied to a communication transaction, identifies that communication transaction to be a respective one of the selected communication transactions; and

at a portal, connected between the untrustworthy network and the trusted network:

10 selectively transferring the database of protection rules from said server via said untrustworthy network;

receiving a communication transaction from the untrustworthy network for transfer to the trustworthy network;

15 applying each of the protection rules to the received communication transaction; and

preventing the transfer of the received communication transaction to the trustworthy network if a protection rule identifies the received communication transaction to be a respective one of the selected communication transactions.

11. The security method of claim 10 wherein the transfer of the database from the server to the portal is via a secure protocol.

12. The security method of claim 10:

wherein each of said protection rules may be a selected one of two classes,  
exclusion or guard; and

wherein, at the portal, the step of preventing is further characterized as:

5 preventing the transfer of the received communication transaction to the  
trustworthy network if a protection rule identifies the received  
communication transaction to be a respective one of the selected  
communication transactions, if said protection rule is of the exclusion  
class; but

10 selectively transferring the received communication transaction to the  
trustworthy network if a protection rule identifies the received  
communication transaction to be a respective one of the selected  
communication transactions, if said protection rule is of the guard  
class.

13. The security method of claim 12 further comprising, at the portal:

selectively transferring to the server at least a portion of each received  
communication transaction identified to be a respective one of the  
selected communication transactions.



14. The security method of claim 13 further comprising, at the server:  
receiving said portions of said communication transactions identified to be a  
respective one of the selected communication transactions; and  
in response to receiving said portion of a communication transaction  
identified to be a respective one of the selected communication  
transactions by a protection rule of the guard class, analyzing said  
portion to determine if said communication transaction represents a  
security threat to the trustworthy network, and, if it is so determined,  
constructing a new protection rule of the exclusion class and adding said  
new protection rule to said database.
15. The security method of claim 14 further including, at the server:  
analyzing said portion using an expert system.
16. The security method of claim 15 wherein, at the server, the step of  
constructing the new protection rule is further characterized as:  
constructing said new protection rule using the expert system.
17. The security method of claim 16 wherein, at the server, the expert system  
is guided by a human expert.
18. The security method of claim 13 further comprising, at the server:  
receiving said portions of said communication transactions identified to be a  
respective one of the selected communication transactions; and  
in response to receiving said portion of a communication transaction  
identified to be a respective one of the selected communication  
transactions by a protection rule of the guard class, providing said  
portion to a human expert to determine if said communication  
transaction represents a security threat to the trustworthy network,  
receiving new protection rules from said human expert, and adding said  
new protection rules to said database.

19. A portal for use in a communications security system to prevent transfer  
of selected communication transactions from an untrustworthy network to a  
trustworthy network, the security system including a server, connected to the  
untrustworthy network, that maintains a database of protection rules, each of  
5 which, when applied to a communication transaction, identifies that  
communication transaction to be a respective one of the selected communication  
transactions, the portal, when connected between the untrustworthy network  
and the trusted network:

10 selectively transferring the database of protection rules from said server  
via said untrustworthy network;

receiving a communication transaction from the untrustworthy network  
for transfer to the trustworthy network;

applying each of the protection rules to the received communication  
transaction; and

15 preventing the transfer of the received communication transaction to the  
trustworthy network if a protection rule identifies the received  
communication transaction to be a respective one of the selected  
communication transactions.

20. A server for use in a communications security system to prevent transfer of selected communication transactions from an untrustworthy network to a trustworthy network via a portal, the server, when connected to the untrustworthy network:

- 5 maintaining a database of protection rules, each of which, when applied to a communication transaction, identifies that communication transaction to be a respective one of the selected communication transactions; and
- selectively transferring the database of protection rules via said untrustworthy network to said portal for application by said portal to
- 10 each communication transaction received by said portal to prevent the transfer of the received communication transaction to the trustworthy network by the portal if a protection rule, when applied by the portal, identifies the received communication transaction to be a respective one of the selected communication transactions.

# METHOD FOR COMMUNICATION SECURITY AND APPARATUS THEREFOR

## ABSTRACT OF THE DISCLOSURE

A FireNet security system in which trustworthy networks, called BlackNets, each comprising One (1) or more client computers, are protected by FireBreaks against attacks from untrustworthy networks, called RedNets. All incoming transactions from the RedNet are examined by the FireBreak to  
5 determine if they violate any of a plurality of protection rules stored in a local protection rules database. Any transaction found to be in violation is discarded. Valid transactions are forwarded to the BlackNet. If an otherwise valid transaction is found to be suspicious, the FireBreak will forward to a FireNet  
10 Server relevant information relating to that transaction. If the FireNet Server verifies that the transaction is indeed part of an attack, the FireNet Server will create new protection rules suitable to defend against the newly identified source or strategy of attack. Periodically, all FireBreaks in the FireNet system will transfer, directly or indirectly, all new rules.

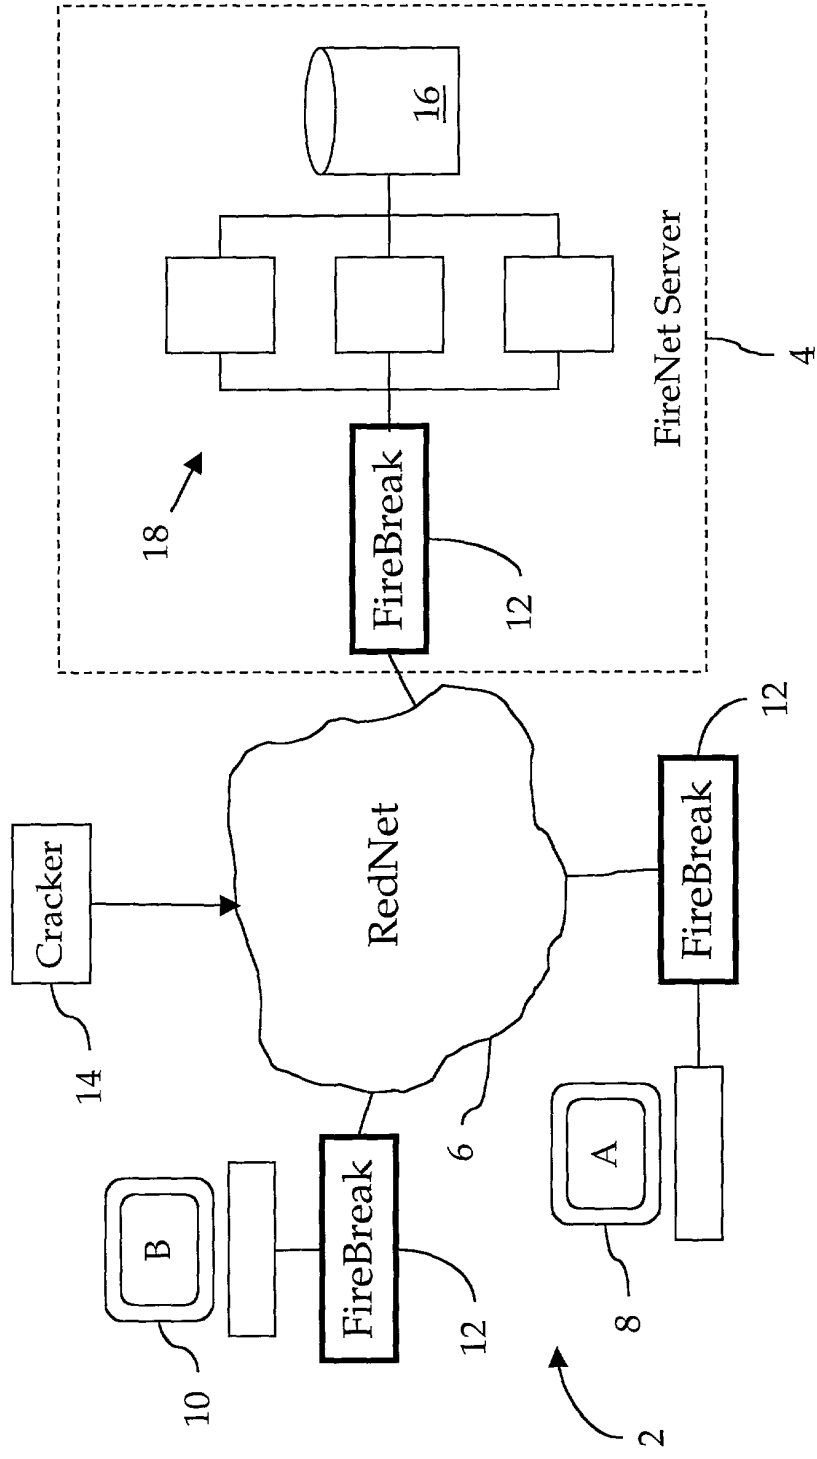


Fig. 1

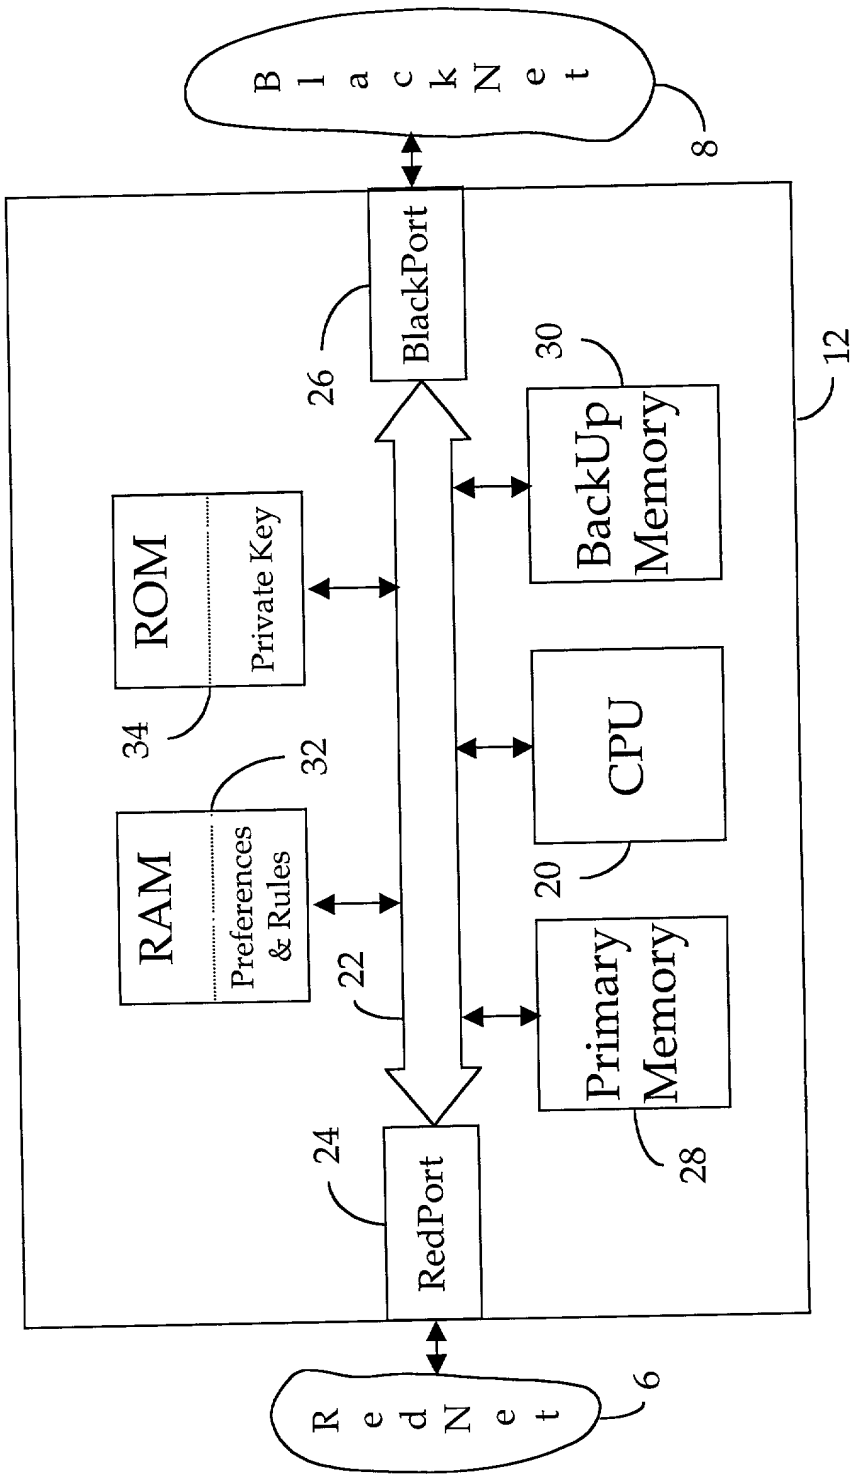
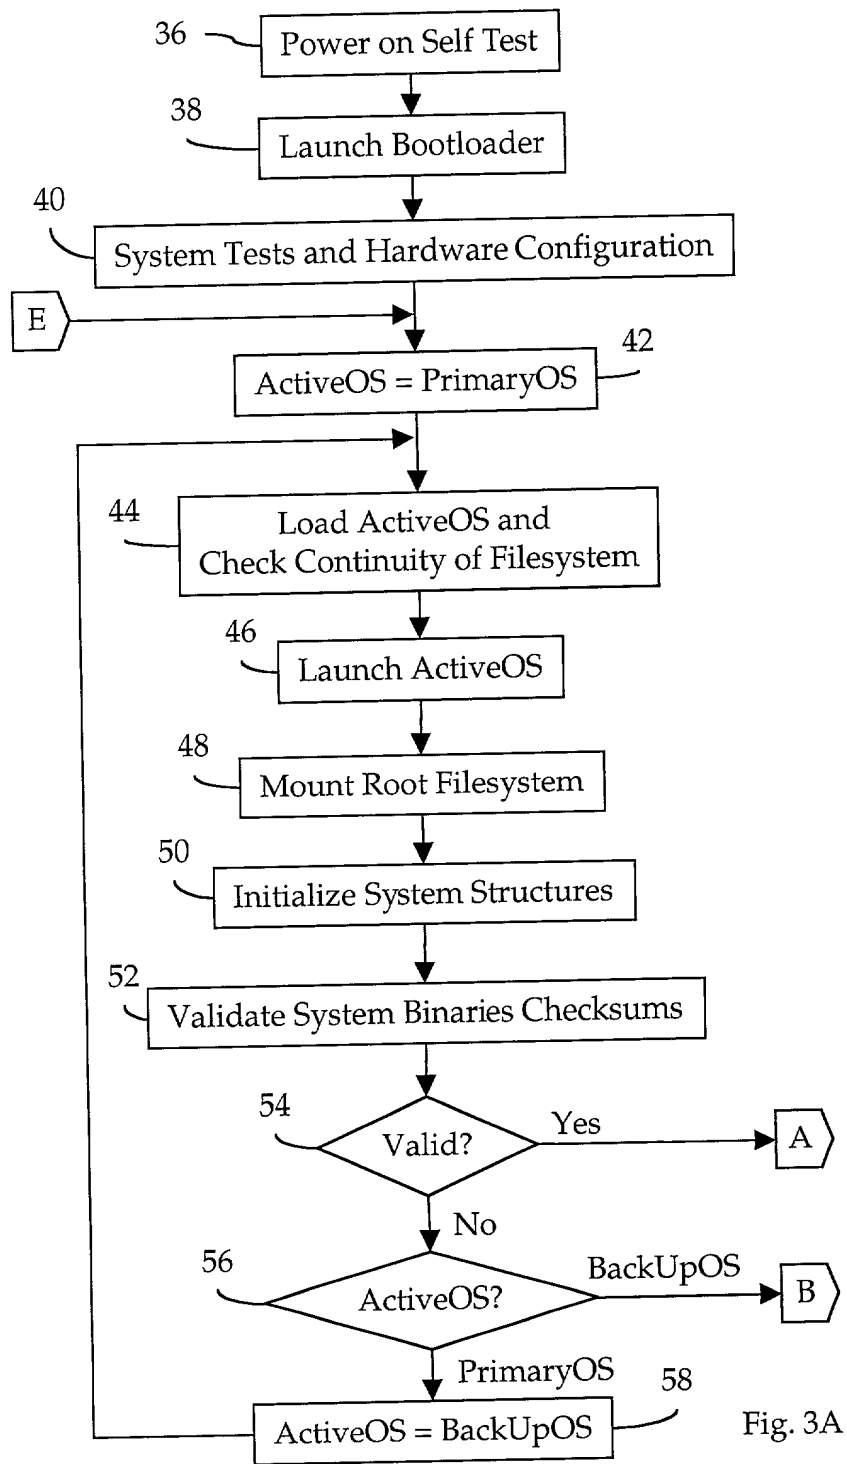


Fig. 2



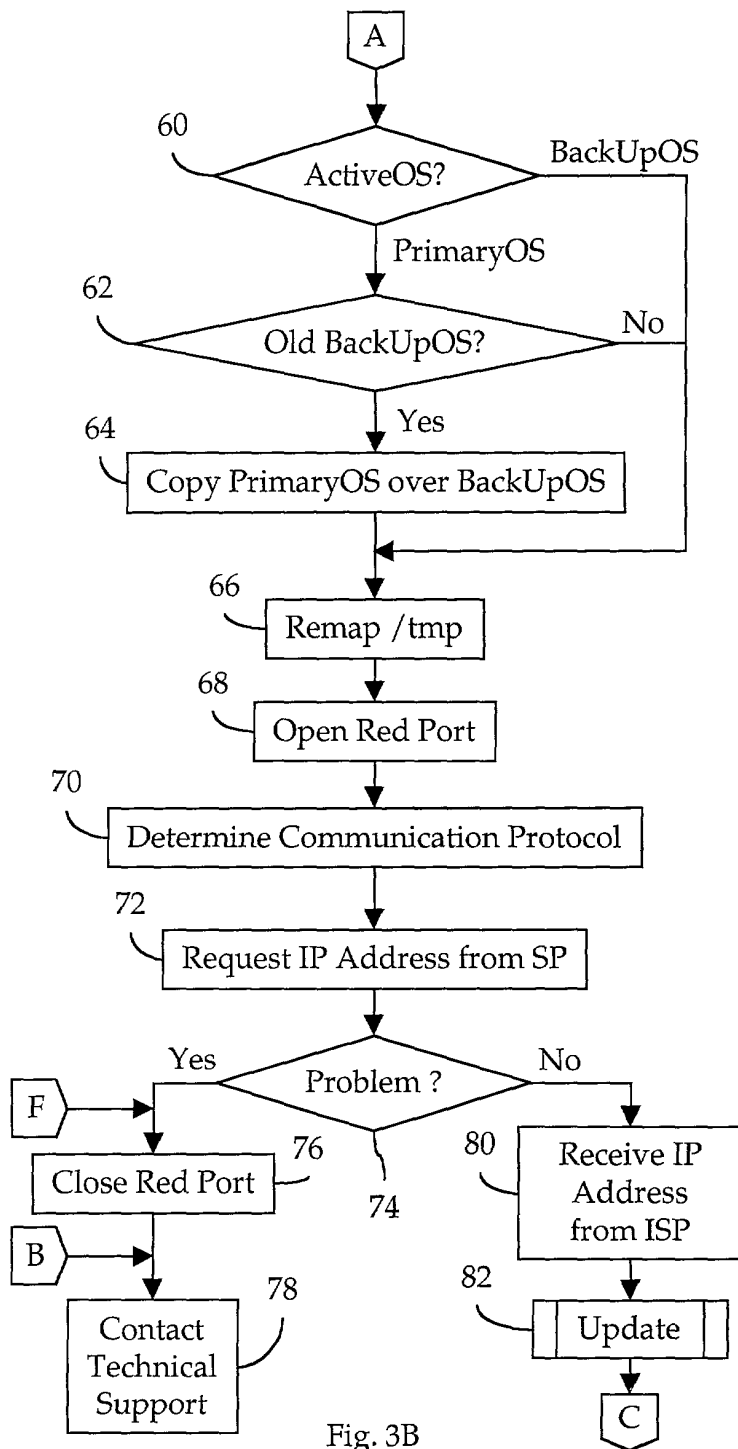


Fig. 3B



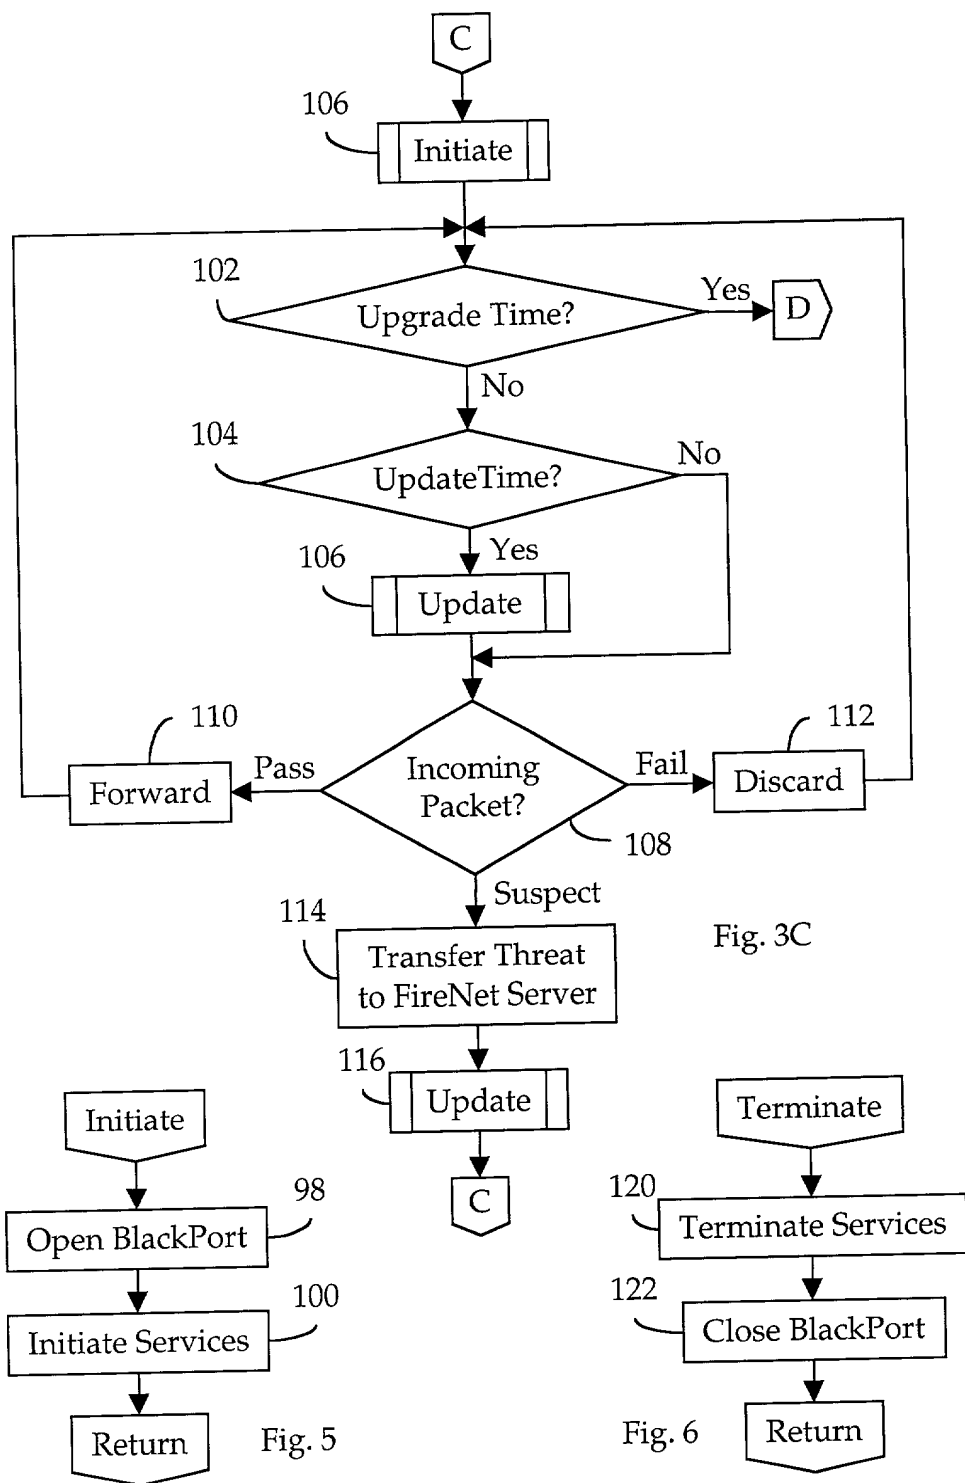
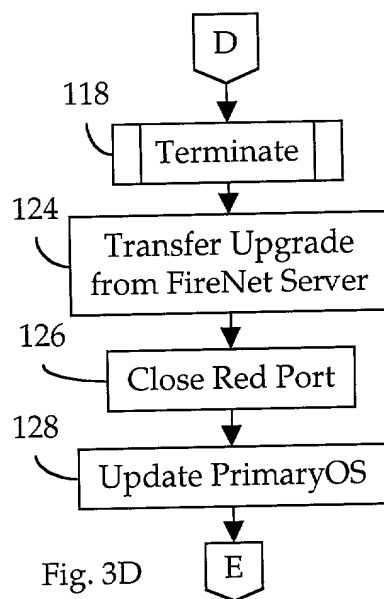
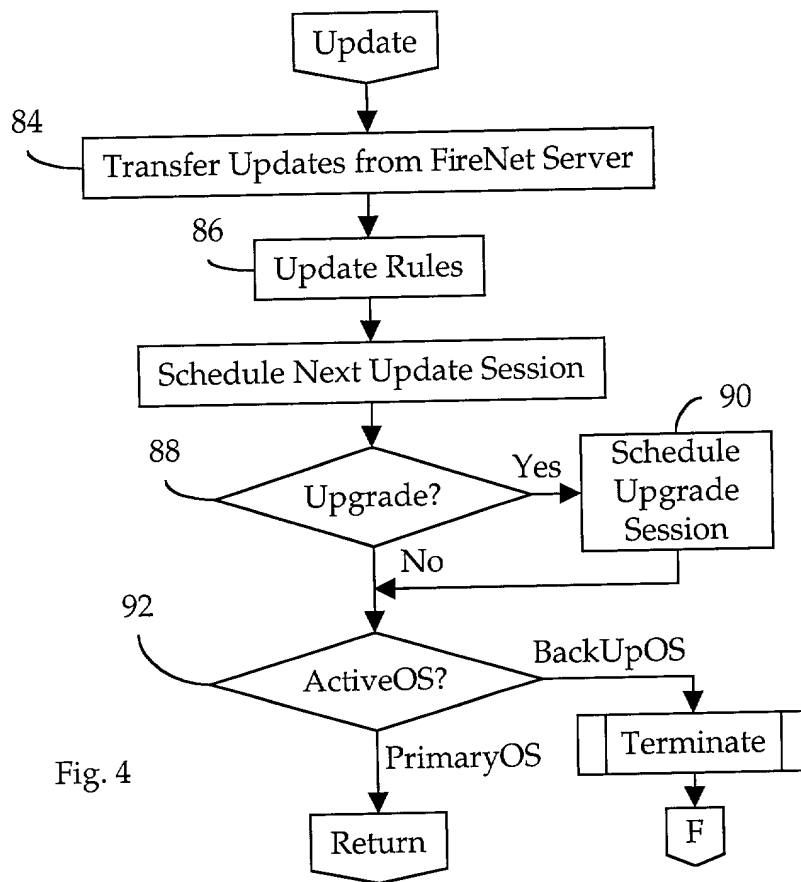


Fig. 3C

Fig. 5

Fig. 6



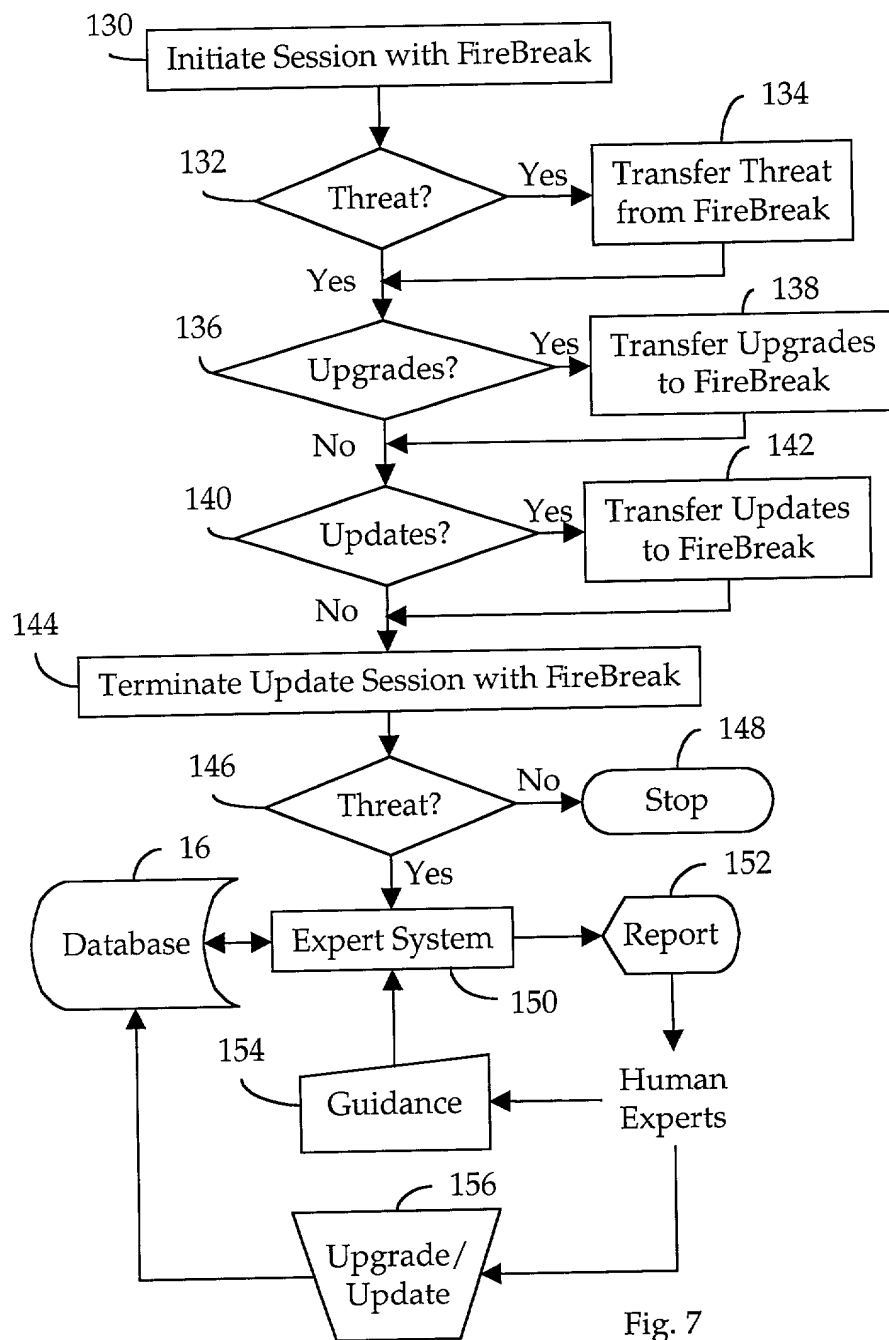


Fig. 7

# DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

## INVENTOR AND SPECIFICATION IDENTIFICATION

My residence, post office address and citizenship are as stated below next to my name, I believe that I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

### METHOD FOR COMMUNICATION SECURITY AND APPARATUS THEREFOR

TITLE OF INVENTION

the specification of which is attached hereto.

## REVIEW OF PAPERS AND ACKNOWLEDGMENT OF DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I do not know and do not believe that the invention claimed in the above-identified specification was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, and that the same was not in public use or on sale in the United States of America more than one year prior to this application.

I acknowledge the duty to disclose to the Patent and Trademark Office information which I know is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

## FOREIGN APPLICATIONS

The invention claimed in the above-described specification has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

## POWER OF ATTORNEY

I hereby appoint Jeffrey Van Myers (Reg. No. 27,362), who is registered to practice before the Patent and Trademark Office, as my attorney with full power of substitution and revocation, to prosecute this application, to make alterations or amendments therein, to receive the patent and transact all business in the Patent and Trademark Office connected therewith.

All **CORRESPONDENCE** should be addressed to:

J.V. Myers & Associates, P.C.  
7101 Highway 71 West Suite 214  
Austin, Texas 78735

All **TELEPHONE INQUIRIES** may be directed to Jeffrey Van Myers at (512) 301-8330.

I hereby declare I have read this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

HAND PRINT DATE BEFORE SIGNING

Full name of sole or

first joint inventor Stuart D. Green Citizenship USA  
Inventor's signature Stuart D. Green Date July 24, 2000  
Residence 15204 English River Loop, Leander, TX 78641  
Post Office Address \_\_\_\_\_

Full name of

second joint inventor Scott G. Brown Citizenship USA  
Inventor's signature Scott G. Brown Date July 25, 2000  
Residence 1908 B Westridge Dr., Austin, TX 78704  
Post Office Address \_\_\_\_\_

Full name of

third joint inventor Jonathan M. Craip Citizenship USA  
Inventor's signature Jonathan M. Craip Date 7/25/2000  
Residence 4450 W. FM 150, Kyle TX 78640  
Post Office Address P. O. Box 1772, Kyle, TX 78640

Full name of

fourth joint inventor Jeffrey Van Myers Citizenship USA  
Inventor's signature Jeffrey Van Myers Date 24 July 2000  
Residence 3400 Elderhill Rd., Driftwood, TX 78619  
Post Office Address P. O. Box 130, Driftwood, TX 78619

Full name of sole or

fifth joint inventor Carl A. Perry Citizenship USA  
Inventor's signature Carl A. Perry Date 24 JULY 2000  
Residence 11701 N. Hwy 183, RR1, Florence, TX 76527  
Post Office Address \_\_\_\_\_

Full name of

sixth joint inventor Marcus L. Yax Citizenship USA  
Inventor's signature Marcus L. Yax Date 25 July 2000  
Residence 8904 Francia Tr., Austin, TX 78748  
Post Office Address \_\_\_\_\_